

CDDD 32P



Control Desk Direct Dialling Module CDDD 32P

To base station CD 810P I / CD 800P I up to 3 button modules with 32 buttons each can be connected. The buttons can be assigned to various functions: direct dialling with call indication (conversation, call, emergency call), output functions

e.g.: switching of light circuits, starting processes opening of doors or gates, etc.; Indication of input messages, e.g. indication of door and gate states.

CDDD 32P

Direct dialling module with 32 LED-buttons (3-colour), four labelling fields, protection classification IP 50, polycarbonate construction.

Technical Data – Benefits

TECHNICAL DATA

IP rating:	IP 50
Front panel:	Polycarbonate
Buttons:	32 direct dialling buttons with 3-colour LEDs activation force: 3 N, 1.5×10^6 cycles
Connection:	ribbon cable to base station (length: 35 cm) or to next CDDD 32P module
Power supply:	20–30 VDC; recommended power supply unit: PA30W24V Connection to first direct dialling module. This module supplies all further modules. Attention: The direct dialling modules may not be powered with the same power supply as the base station! A separate floating power supply must be used for galvanic separation of the power supplies.
Operating temperature range:	0°C to 70°C (32°F to 158°F)
Storage temperature range:	–20°C to 70°C (–4°F to 158°F)
Relative humidity:	up to 80% not condensing
Mounting:	with included rear housing can be installed in control desks or as desktop version
Measurements:	with included rear housing W 262 mm, H 196 mm, D 45 mm (see page 5)
Weight incl. package:	approx. 850 g (1.9 lbs)
Colour:	white-aluminium: light-grey (like RAL 9006) rear housing: graphite-grey (like RAL 7024)

BENEFITS

All buttons of the button module can be assigned to the following functions:

- Indication of conversations, call requests, input messages, conditions of outputs
- Acknowledgement of call requests and input messages
- Dialling of a single button as long as pressed: 0–9, T, X, function buttons F4–F6 (up, down and enter)
- Direct dialling 1 to 6-digits when pressed, with optional deleting (X) before pressing (toggle) and optional deleting after releasing
- Control of outputs: ON, OFF, toggle, ON as long as button is pressed
- Simulation of input conditions with a predefined level when pressed and released (and all possible functionalities such as ComWIN-message, etc.)

EXTENT OF SUPPLY

- Direct dialling module CDDD 32P
- Rear housing incl. connection module and mounting material
- Connection cable (length: 35 cm / 14 in)
- Short reference

SYSTEM REQUIREMENTS

- Base station CD 810P I / CD 800P I and a subscriber on subscriber card with feature level D, configured as control desk.


Installation

PRECAUTIONS / MOUNTING INSTRUCTIONS

- When opening the stations ESD precautions must be observed.
- The direct dialling modules may only be opened by authorised service engineers.
- The faceplates are fastened to the rear housings via screws from behind. Therefore the control desk surface must be accessible from the rear.
- The extent of supply includes screws for sheet metal (6 pcs. 3.5 mm x 9.5 mm Tx10) and wood screws (6 pcs. 3.5 mm x 30 mm Tx10) for mounting in desks.
- For placing on desks the desk kit CDDK is available. Per base station / direct dialling module one CDDK is required.


CONNECTION

- The first direct dialling module is connected to the base station with the included ribbon cable.
- All further direct dialling modules are connected to the previous direct dialling module.

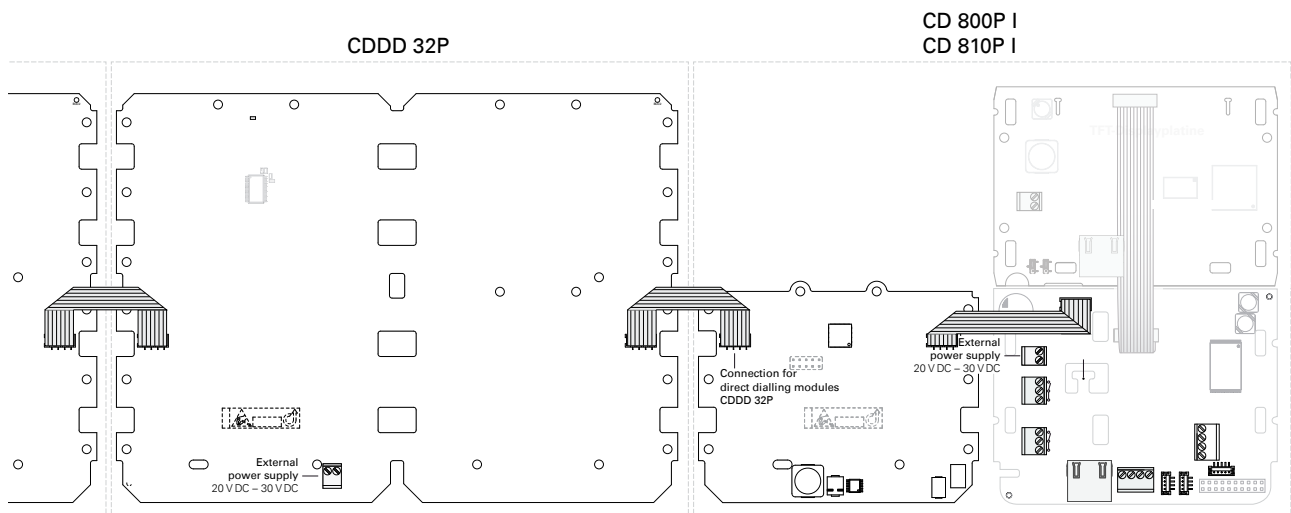

MEASUREMENTS CDD 32P

Measurements in mm (inch), not to scale!

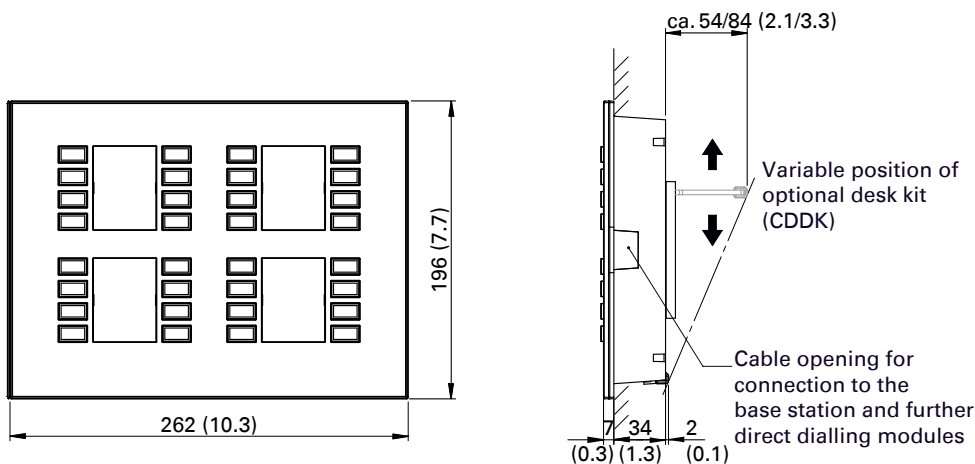

COMMEND

Ein starkes Netzwerk | Weltweit

Europa

SCHWEIZ : **Commend AG**
LIECHTENSTEIN : Tel. +41-44-955 02 22
: www.commend.ch

FRANKREICH : **Commend France S.A.S.**
: Tel. +33-149 18 16 40
: www.commend.fr

SPANIEN : **Commend Ibérica S.L.**
PORTUGAL : Tel. +34-91-395 24 98
: www.commend.es

ITALIEN : **Commend Italia S.R.L.**
: Tel. +39-035-95 39 63
: www.commend.it

NIEDERLANDE : **Commend B.V.**
BELGIEN : Tel. +31-76-200 01 00
LUXEMBURG : www.commend.nl

ÖSTERREICH : **Commend Österreich GmbH**
SLOWENIEN : Tel. +43-1-715 30 79
RUSSLAND : www.commend.at
UNGARN :

KROATIEN : **Commend Adria d.o.o.**
SERBIEN : Tel. +385-1-369 11 23
BOSNIEN-HERZEGOWINA : www.commend.hr
MONTENEGRO :
MAZEDONIEN :
KOSOVO :
ALBANIEN :

SLOWAKEI : **Commend Slovakia spol. s r.o.**
TSCHECHIEN : Tel. +421-2-58 10 10 40
: www.commend.sk

VER. KÖNIGREICH : **Commend UK Ltd**
IRLAND : Tel. +44-1279-87 20 20
: www.commend.co.uk

SCHWEDEN : **Commend Business Hub Nordic**
NORWEGEN : JNT Sound System AB
FINNLAND : Tel. +46-8-99 30 60
DÄNEMARK : www.commend.se
ISLAND :

POLEN : **C&C Partners Telecom Sp.z o.o.**
: Tel. +48-65-525 55 55
: www.ccpartners.pl

DEUTSCHLAND : **Schneider Intercom GmbH**
: Tel. +49-211-88285-333
: www.schneider-intercom.de

Amerika

USA : **Commend Inc.**
KANADA : Tel. +1-201-529-2425
LATEINAMERIKA : www.commendusa.com

Asien – Pazifik

AUSTRALIEN : **Commend Australia**
NEUSEELAND : Tel. +61-3-9729-3700
: www.commend.com.au

CHINA : **Commend Business Hub China**
: Tel. +86-21-52 13 19 28
: www.commend.cn

ISRAEL : **Sberlophone Ltd**
: Tel. + 972-4-834 10 32
: www.sberlophone.co.il

SINGAPUR : **Commend Business Hub Asia**
: Isolectra Far East Pte. Ltd
: Tel. +65-6272-2371
: www.commend.com.sg

Afrika

SÜDAFRIKA : **Commend Business Hub South Africa**
: Evolving Management Solutions (Pty) Ltd
: Tel. +27-11-274 6665
: www.commend.co.za

ALGERIEN : **Commend France S.A.S.**
TUNESIEN : Tel. +33-149 18 16 40
MAROKKO : www.commend.fr

Andere Länder

: **Commend International GmbH**
: Tel. +43-662-85 62 25
: www.commend.com



SECURITY AND COMMUNICATION